




MVE 19500/1N-FD-105BR B [DN619500A5BRUAB000]

3 PH - 6 poles - 1000 RPM - 380-415/660-720 V - 50 Hz

Working moment [Kg*cm]	Unbalance [Kg*cm]	Centrifugal force [Kg]	Nominal voltage [V]	Input power [kW]	Current [A]	Power Factor	Ia/In
3.632	1.816	20.285	380-415/660-720	12	Δ 24,08 Y 13,92	0,72	5,4

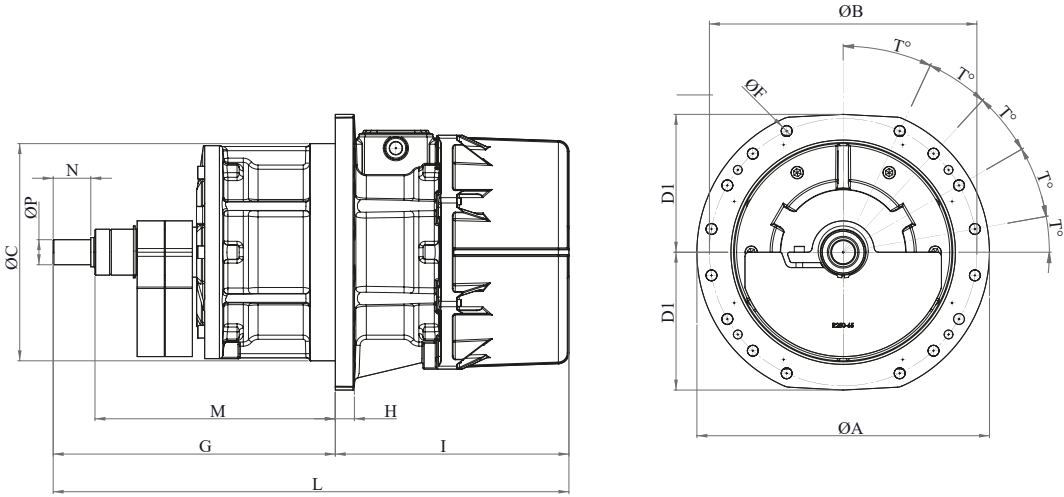

OVERALL DIMENSIONS [mm]																
Weight [Kg]	B	F	Holes number	A	C	D	D1	G	H	I	L	M	N	O	P	T
720	590	26	12	645	480	270	270	675	35	520	1.225	585	90	18	60	25°-17,5°-17,5°-20°-10°

TECHNICAL FEATURES						
Type of grease	Greased for life	Screw	Washer	Clamping torque [Nm]	Cable type	Cable gland
MOBILITH SHC 100	Yes	M24	25 x 44 mm	696	4G6 110°C	M32 110°C

BEARINGS				
Bearing model	Type	Life 100%	Life 80%	Life 50%
NJ 2322		6652	13996	67051

CERTIFICATION	
Atex II 3D Ex tc IIIc Tx IP66 [Tx Size 10-30:100°C - Tx Size 40-91:135°C] T.Amb -20/+40°C	

REV.2-26/06/2020