




MVE 5500/1N-FD-80AX A
[DN60550080AXJAA000]

3 PH - 6 poles - 1000 RPM - 220-240/380-415 V - 50 Hz

Working moment [Kg*cm]	Unbalance [Kg*cm]	Centrifugal force [Kg]	Nominal voltage [V]	Input power [kW]	Current [A]	Power Factor	Ia/In
959,6	479,8	5.360,89	220-240/380-415	5,8	Δ 20,76 Y 12	0,7	5,5

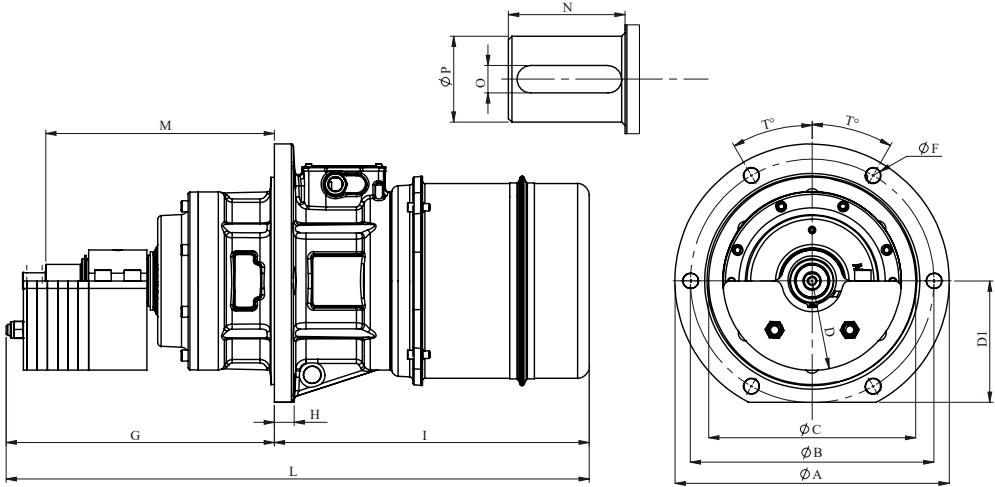

OVERALL DIMENSIONS [mm]															
Weight [Kg]	B	F	Holes number	A	C	D	D1	G	I	L	M	N	O	P	T
243,3	355	22	6	400	302	130	177	459	521	980	333	34	8	25	30°

TECHNICAL FEATURES						
Type of grease	Greased for life	Screw	Washer	Clamping torque [Nm]	Cable type	Cable gland
MOBILITH SHC 100	Yes	M20	20 x 41 mm	373	4G4 110°C	M25 105°C

BEARINGS				
Bearing model	Type	Life 100%	Life 80%	Life 50%
NJ 2315				

CERTIFICATION	
Atex II 3D Ex tc IIIc Tx IP66 [Tx Size 10-30:100°C - Tx Size 40-91:135°C] T.Amb -20/+40°C	

REV:1-22/05/2019