




MVE 7000/075N-FD-91BP A
[DN80700091BPUAA000]

3 PH - 8 poles - 750 RPM - 380-415/660-720 V - 50 Hz

Working moment [Kg*cm]	Unbalance [Kg*cm]	Centrifugal force [Kg]	Nominal voltage [V]	Input power [kW]	Current [A]	Power Factor	Ia/In
2.218	1.109	6.969,97	380-415/660-720	7,5	Δ 9,03 Y 5,22	0,75	4,6

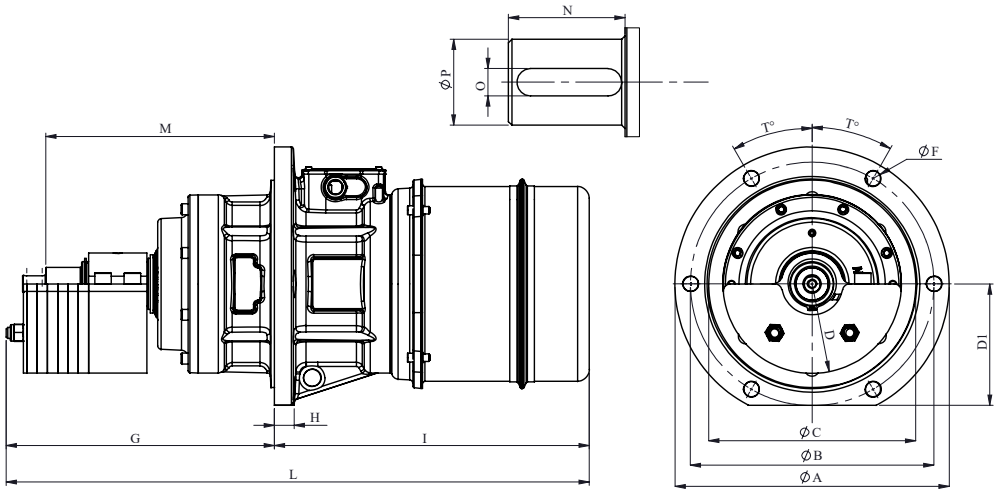

OVERALL DIMENSIONS [mm]															
Weight [Kg]	B	F	Holes number	A	C	D	D1	G	I	L	M	N	O	P	T
421	500	22	12	560	400	180	260	488,5	523	1.011	392	36	12	40	25° - 27.5°

TECHNICAL FEATURES						
Type of grease	Greased for life	Screw	Washer	Clamping torque [Nm]	Cable type	Cable gland
MOBILITH SHC 100	Yes	M20	20 x 41 mm	373	4G6 110°C	M32 105°C

BEARINGS				
Bearing model	Type	Life 100%	Life 80%	Life 50%
NJ 2320				

CERTIFICATION	
Atex II 3D Ex tc IIIc Tx IP66 [Tx Size 10-30:100°C - Tx Size 40-91:135°C] T.Amb -20/+40°C	

REV:1-22/05/2019