

Waste Water Treatment

Fine Belt Screens VFR

13



Description ▼

VFR Fine Belt Screens are used for fine screening of waste water. They are designed for in-channel installation. They consist of a set of filtering steps manufactured from perforated plate media which are moved by two chains equipped with chain stretcher, as well as anti-friction and anti-noise sliding blocks.

Solids screened from waste water are conveyed by the filtering belt to the outlet on top of the screen. The arrangement of the filter elements forms a "step belt" which ensures that screenings are picked up and easily removed. The screen is equipped with a chute in front of the filtering belt to avoid clogging.

A double cleaning system composed of a motorised roller brush equipped with synthetic bristles and of a washing bar cleans the filter elements. The chains are moved by sprockets fitted on a drive shaft that is connected to the gear reducer. The latter has to be equipped with a torque limit switch.

Application ▼



Benefits ▼

- ✓ Reduced service requirements (no need to take the screen out of the channel);
- ✓ Special design of filtering elements for easy maintenance and replacement;
- ✓ High capture efficiency of solids.



www.savi-water.com
www.wamgroup.com

Waste Water Treatment


Fine Belt Screens VFR



Technical Features / Performance

- ▶ 6 up to 2,000 mm wide sizes available
- ▶ 65 degree incline angle
- ▶ Perforated media openings from 3 to 7 mm
- ▶ Chain drive recessed into the side rails
- ▶ Double cleaning system
- ▶ Material: hot dip galvanised steel, 304 L / 316 L SS
- ▶ Control panel (optional)

Overall Dimensions

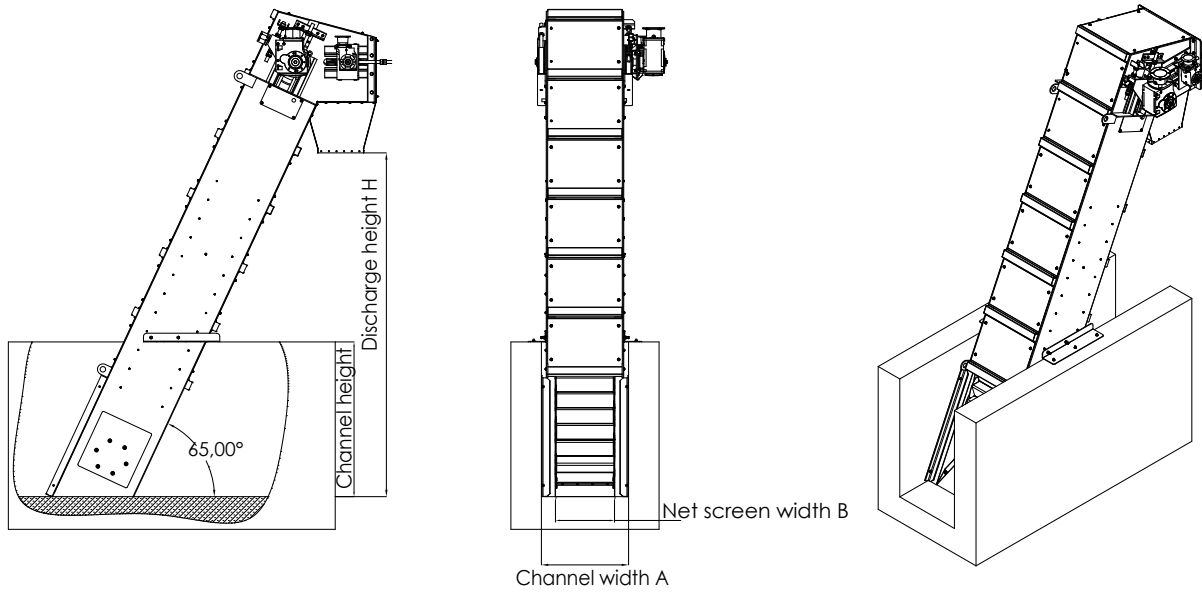

VFR - FINE BELT SCREEN - OVERALL DIMENSIONS

MODEL	CHANNEL WIDTH A - mm	NET SCREEN WIDTH B - mm	DISCHARGE HEIGHT FROM CHANNEL BOTTOM H - mm	OPENING SIZES mm	CHAIN POWER kW	BRUSH POWER kW
VFR 750	750	500	customer's requirement	3 - 5 - 7	0.75	0.55
VFR 1000	1,000	750	customer's requirement	3 - 5 - 7	1.1	0.55
VFR 1250	1,250	1,000	customer's requirement	3 - 5 - 7	1.1	0.55
VFR 1500	1,500	1,250	customer's requirement	3 - 5 - 7	1.5	0.55
VFR 1750	1,750	1,500	customer's requirement	3 - 5 - 7	1.5	0.55
VFR 2250	2,250	2,000	customer's requirement	3 - 5 - 7	1.5	0.55

Rights reserved to modify technical specifications.

DS.VFR.EM.December 2017_200



www.savi-water.com
www.wamgroup.com